



---

Verona RS



**SANREMO**  
COFFEE MACHINES

**Realtime Stability**

*A sprint of technology*



*made in italy*

# SANREMO

COFFEE MACHINES

**GROUP SR 61**  
Sanremo exclusive design that allows an accurate maintenance of the set temperature



**REALTIME STABILITY**  
Constancy in the electronic controlled temperature ( $\pm 0,2^{\circ}C$ )



**SOFT PRE-INFUSION**  
Flowactive System to accurately control flow rate and pre-infusion



**POWER DRY STEAM**  
Silky milk at high capacity


**ENERGY SAVING SYSTEM**  
EnergySavingSystem for a 30% energy saving






**CERTIFICATIONS**  
Certified and WCE homologated



Single group display:

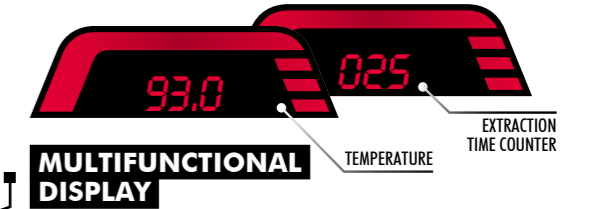

Touch display:

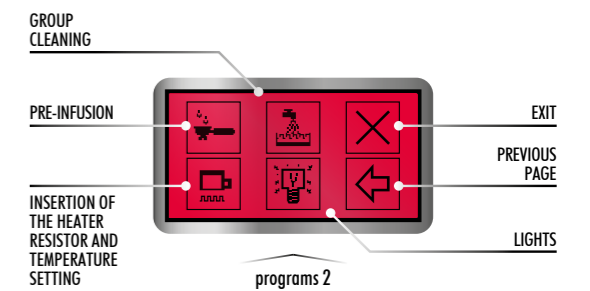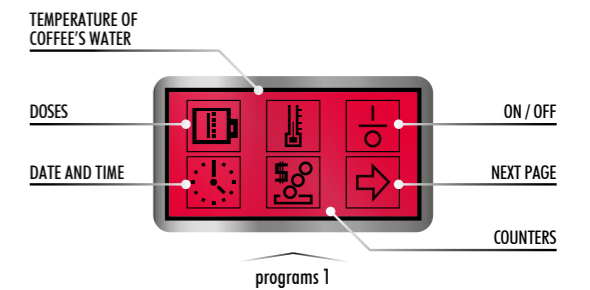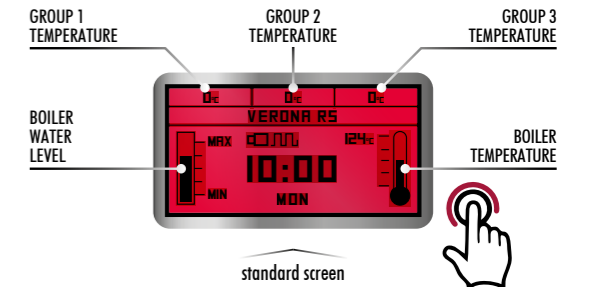


## Characteristics



**MIXED INFUSION HOT WATER FOR TEA AND HERBAL TEAS**  
Immediate mixing of cold/hot water for a better chemical and organoleptic quality.



**ELECTRONIC AUTO-LEVEL**  
Through an electronic level probe the boiler is automatically filled and maintained to the right filling level.



**STATIC RELAY BOILER TEMPERATURE**  
It allows to regulate with the temperature as accurately as possible.



**STAINLESS STEEL COFFEE BOILER**  
It guarantees excellent stability and thermal precision, associated with resistance to oxidation and limestone.



**INDEPENDENT REGULATION T WATER COFFEE**  
Maximum temperature precision and constancy of distribution.



**SETTABLE ELECTRONIC PRE-INFUSION**  
Water flow management of coffee powder - precision: 0,1 sec.



**STAINLESS STEAM PIPES "COLD TOUCH"**  
Anti-burning pipes, even after a prolonged use. Provided with high-performance steam terminals "Late air".



**Verona RS**  
Link to the website



**ADJUSTABLE HEATER TEMPERATURE**  
It allows to keep cups at the optimal temperature in the different working conditions.



**LED LIGHT OF THE WORKING AREA**  
It allows to effectively working in any lighting condition.



**MULTIFUNCTION DISPLAY**  
It allows to monitor the right functioning of the machine and to program the main functions.



**DOUBLE READING GAUGE**  
It allows to control at the same time the boiler pressure and the distribution pressure.



**ENERGY SAVING SYSTEM**  
Insulators and smart energy management to save up to 30% energy.



**GROUP SR 61**  
Exclusive Sanremo design that allows a precise maintenance of the set temperature.



**EASY SERVICE**  
Easy access to the internal parts for a quick and easy technical assistance.



**AUTOMATIC CLEANING CYCLE**  
Process to clean the coffee groups.



**HIGH PERFORMANCE VOLUMETRIC PUMP**  
Constant pressure even after a prolonged and simultaneous use of more groups.



**COMPETITION FILTERS**  
Exclusive Sanremo design to better capture coffee's aromas and fragrances.



**TEMPCONTROL**  
For a very-high thermal stability ( $\pm 0.2^{\circ}C$ ).

## Optional



**AUTOSTEAM**  
Steam pipe characterized by an electronic system that allows to mount and/or heat milk at the set temperature.



**EXTERNAL VOLUMETRIC PUMP**



**STAINLESS STEEL NAKED PORTAFILTERS**




**HIGH POWER STEAM TERMINAL**  
(increased hole diameters)




**STAINLESS STEEL PORTAFILTERS WITH COMPETITION FILTER**  
Shape and volume designed to better capture coffee aromas and fragrances. Sanremo exclusive design.

# Verona RS


## Models



32.28 inches / 820 mm

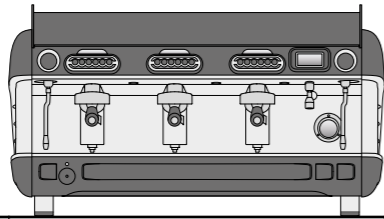

41.34 inches / 1050 mm

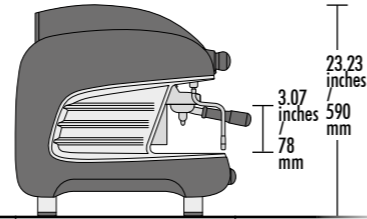

24.02 inches / 610 mm


23.23 inches  
590 mm  
3.07 inches  
78 mm

- 2 group RS**
- 2 steam taps
  - 1 water tap
  - 1 one-cup portafilters
  - 2 two-cup portafilters

- 3 group RS**
- 2 steam taps
  - 1 water tap
  - 1 one-cup portafilters
  - 3 two-cup portafilters



### TALL VERSION

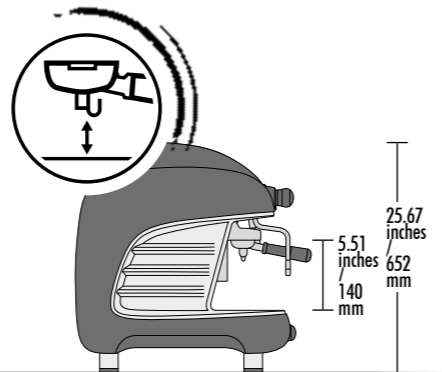

25.67 inches  
652 mm  
5.51 inches  
140 mm

## Technical data


		2 group RS	3 group RS
voltage	V	220-240 1N	280-415 3N
power input	kW	5.6	6.4
steam boiler capacity	US gal / lt	2.27 / 8.6	3.7 / 14
steam boiler power	kW	3.8	3.8
pump power	kW	0.15	0.15
RS boiler capacity	US gal / lt	0.26 / 1	0.39 / 1.5
RS boiler element power	kW	1	1.5
cup-heater power	kW	0.2	0.25
net weight	lb / kg	150 / 68	187 / 85

## Colors

	Black	RAL 9005
	White	RAL 1013


## Tempcontrol

### Multiboiler System

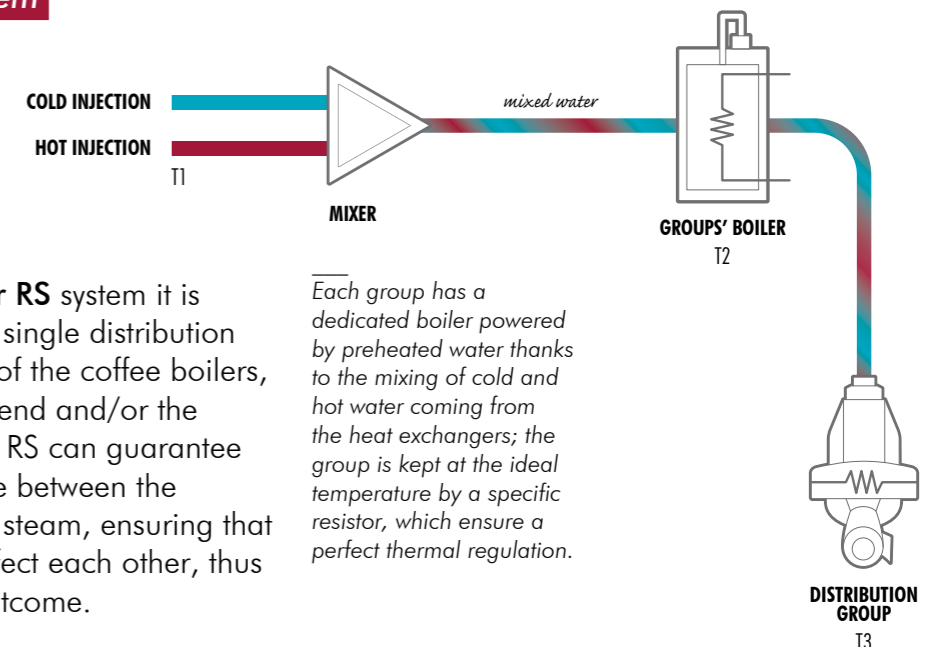

Thanks to the **Multiboiler RS** system it is possible to set – for each single distribution group – the temperature of the coffee boilers, in accordance with the blend and/or the single-origin coffee used. RS can guarantee a complete independence between the distribution of coffee and steam, ensuring that the two actions do not affect each other, thus compromising a good outcome.


Each group has a dedicated boiler powered by preheated water thanks to the mixing of cold and hot water coming from the heat exchangers; the group is kept at the ideal temperature by a specific resistor, which ensure a perfect thermal regulation.

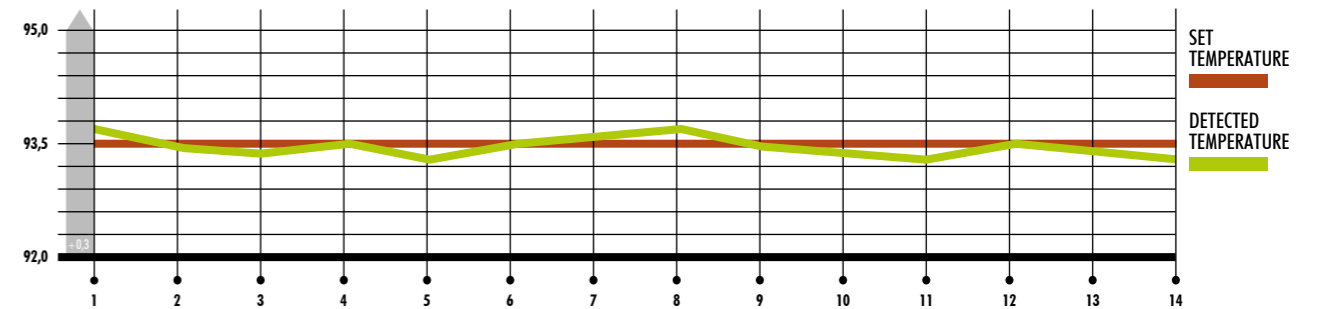

The electronic control unit is equipped with a PID temperature management system, which independently regulates the coffee boilers and the heating of the individual groups.

Thanks to this system, a very high level of thermal stability is guaranteed – with a calibrated variation of  $\pm 0,2^{\circ}\text{C}$  for a perfect extraction of coffee.

## Soft pre-infusion

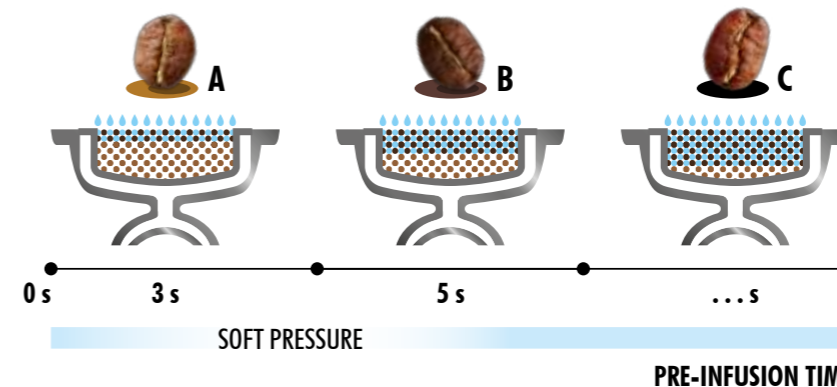

- BLEND / A
- BLEND / B
- SINGLE ORIGIN / C

Pre-infusion is the first phase in the extraction of coffee: the powder is wet and prepared for the following optimal extraction. Furthermore, pre-infusion allows to make the powder uniform in order to avoid the formation of preferential routes.

---

*For more information about our  
coffee machines please contact us  
at [export@sanremomachines.com](mailto:export@sanremomachines.com)*



**SANREMO**  
COFFEE MACHINES

SANREMO coffee machines s.r.l.  
Via Giacomo Bortolan 52  
31050 Vascon di Carbonera [TV] – ITALY  
T +39 0422 448900  
F +39 0422 448935  
[www.sanremomachines.com](http://www.sanremomachines.com)